


# MODEL 585



## TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR

## **FEATURES**

- Clipped Sine Wave Output
- Optional Voltage Control for Frequency Tuning [VCTCXO]
- 7.0mm x 5.0mm Surface Mount Package
- Frequency Range 5 52 MHz
- Fundamental Crystal Design
- Frequency Stability, Options from, ±0.5ppm ~ ±2.5ppm
- Operating Voltage, +2.8Vdc ~ +5.0Vdc
- Operating Temperature to -40°C to +85°C
- Tape & Reel Packaging Standard, EIA-418
- RoHS/Green Compliant [6/6]



## **APPLICATIONS**

The Model 585 is a quartz based analog TCXO with a Clipped Sine output and optional frequency tuning. M585 is suitable for applications such as wireless communications, base stations, small cells, broadband access and test equipment.

#### ORDERING INFORMATION SUPPLY VOLTAGE PACKAGING OPTIONS T = +2.8VdcT - 1k pcs./reel R = +3.0VdcL = +3.3VdcFREQUENCY TUNING [AFC] $S = +5.0Vdc^{-1}$ T = TCXO [no AFC] $A = \pm 5ppm minimum [VCTCXO]$ $B = \pm 8ppm minimum [VCTCXO]$ **FREQUENCY** $[V_C = +1.5Vdc \pm 1.0Vdc]$ Product Frequency Code [3 digits] **OPERATING TEMPERATURE RANGE** Refer to document 016-1454-0, Frequency Code Tables. $H = -10^{\circ}C \text{ to } +60^{\circ}C$ $C = -20^{\circ}C \text{ to } +70^{\circ}C$ FREQUENCY STABILITY \* D = -30°C to +85°C I = -40°C to +85°C $05 = \pm 0.5 \text{ ppm}^{-2}$ $10 = \pm 1.0 \text{ ppm}$ $15 = \pm 1.5 \text{ ppm}$ $20 = \pm 2.0 \text{ ppm}$ $25 = \pm 2.5 \text{ ppm}$ \* Frequency vs. Temperature Only 1] Limited availability. Consult factory. 2] Only available with temperature range codes "H" and "C".


Not all performance combinations and frequencies may be available. Contact your local CTS Representative or CTS Customer Service for availability.

# **ELECTRICAL CHARACTERISTICS**


	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT			
	Maximum Supply Voltage	$V_{CC}$	-	-0.5	-	6.0	V		
	Maximum Control Voltage	$V_{C}$	-	-0.5	-	$V_{CC}$	V		
	Storage Temperature	$T_{STG}$	-	-55	-	+125	°C		
	Frequency Range	$f_0$	Std frequencies listed in Ordering Information	5	- 0.5,1.0	52	MHz		
	Frequency Stability	Δf/f <sub>O</sub>	Frequency vs. Temperature Only	1	± ppm				
	Frequency Stability vs. Initial Calibration vs. Reflow Shift vs. Supply Voltage	_	@ +25°C 1 hour after reflow ±5% change	- - -		1.0 2.0 0.1	± ppm		
	vs. Load		±10% change	-	-	0.2			
	vs. Aging		1st year	-	-	1.0			
	vs. Aging		10 year [Except stability code 05]	-	-	8.0			
ELECTRICAL PARAMETERS	Operating Temperature Order Code 'H' Order Code 'C' Order Code 'D' Order Code 'I'	T <sub>A</sub>	-	-10 -20 -30 -40	+25	+60 +70 +85 +85	°C		
	Supply Voltage Order Code 'T' Order Code 'R' Order Code 'L' Order Code 'S'	V <sub>cc</sub>	±5%	2.66 2.85 3.14 4.75	2.8 3.0 3.3 5.0	2.94 3.15 3.47 5.25	V		
	Supply Current	$I_{CC}$	-	-	-	3.5	mA		
	Control Voltage V <sub>C</sub>		-	0.5	1.5	2.5	V		
	Frequency Tuning [VCTCXO Only]	-	$V_C = 1.5V \pm 1.0V$		5 minir 8 minir		± ppm		
	V <sub>C</sub> Input Impedance	$ZV_C$	-	100	-	-	kOhm		
	Output Waveform		AC coupled Clipped Sinewave						
	Output Voltage Levels	$V_{O}$	-	0.8	-	-	Vp-p		
	Output Load	$R_L // C_L$	- 10 kOhm // 10 p						
	Start Up Time	$T_S$	-	-	-	2	ms		
	Phase Noise <sup>1</sup>	-	-				dBc/Hz		

#### Notes:

1. Phase Noise performance may vary based on output frequency. See example plot at 10 MHz below.

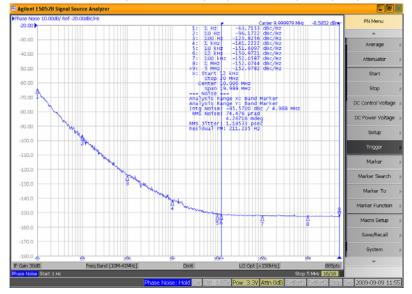


# TEST CIRCUIT - Clipped Sine Load

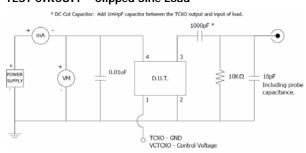

# MODEL 585 TCXO/VCTCXO - CLIPPED SINE WAVE

## MECHANICAL SPECIFICATIONS

## PACKAGE DRAWING

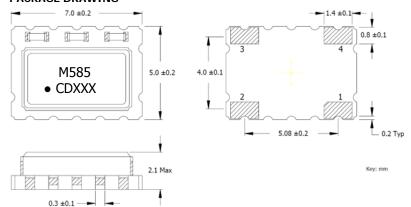

#### MARKING INFORMATION


- 1. M585 CTS Model Series.
- 2. − Pin 1 identifier.
- 3. C CTS identifier.
- 4. D Date code. See Table II for codes.
- 6. xxx Frequency Code.

Refer to document 016-1454-0, Frequency Code Tables.

#### **NOTES**

- 1. DO NOT make connections to non-labeled pins or castellations as they may have internal connections used in the manufacturing process.
- 2. Termination pads (e4); barrier plating is nickel [Ni] with gold [Au] flash plate.
- Reflow conditions per JEDEC J-STD-020, 260°C maximum.
- 4. MSL = 1.

#### SUGGESTED SOLDER PAD GEOMETRY

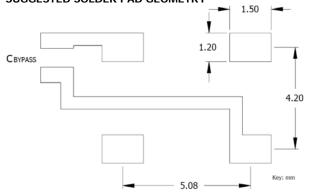

#### **D.U.T. PIN ASSIGNMENTS**

PIN	SYMBOL	DESCRIPTION			
1	V <sub>C</sub>	Control Voltage – VCTCXO [Note 1]			
1	<b>v</b> <sub>C</sub>	GND - TCXO			
2	GND	Circuit & Package Ground			
3	Output	Clipped Sine Wave Output			
4	$V_{CC}$	Supply Voltage			

#### **NOTES**

- 1. Connect to ground for TCXO [no AFC] option.
- 2. DC-Cut Capacitor Required. Add 1000pF capacitor between TCXO output and input of load.

## TABLE II - DATE CODE

MONTH					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC
	YEAR			JAN F	FED	FED IVIAR	APR	IVIAT	JUN	JUL	AUG	JEP	001	NOV	DEC	
2001	2005	2009	2013	2017	Α	В	С	D	Е	F	G	Н	J	K	L	М
2002	2006	2010	2014	2018	N	Р	Q	R	S	Т	U	V	W	Χ	Υ	Z
2003	2007	2011	2015	2019	а	b	С	d	е	f	g	h	j	k	1	m
2004	2008	2012	2016	2020	n	р	q	r	s	t	u	٧	W	Х	У	Z

# PACKAGING INFORMATION [reference]

Device quantity is 1k pcs. maximum per 180mm reel.

